
 TI8104en	Technical Information	
TRC9- Series (T)	Ceiling Humidity and Temperature Sensor with BACnet / Modbus RTU communication	

The TRC9- Series (H&T) is designed to measure temperature in rooms or areas

The Sensor is field replaceable

The sensor comes with a 1m connection cable, other lengths available

The sensor operates with low power supply

BACnet MSTP and Modbus RTU on Board







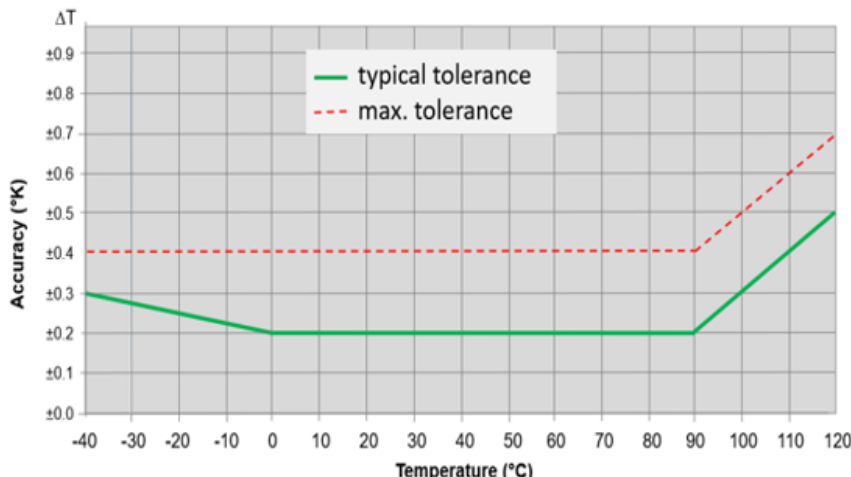
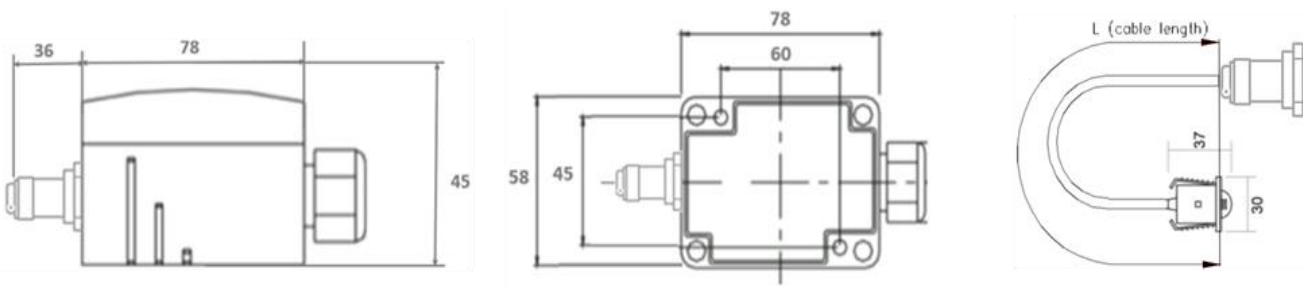
The sensor output is via BACnet MSTP / Modbus RTU communication



Use	In Building Automation System where BACnet MSTP or MODBUS RTU communication protocols are used																			
	Temperature measurement in rooms																			
	Used in all common HVAC applications																			
	Used in Commercial and Industrial Buildings																			
Features	Sensor output via BACnet MSTP / Modbus RTU communication																			
	Selectable communication protocol																			
	Field Replaceable sensor																			
	Modern and practical product design																			
	Easy to use, install and maintain																			
Product Range	<table><tr><td>Order Codes</td><td>Power Supply</td><td>Communication system</td><td>Measuring Variable</td><td>Measuring Units</td><td>Protection</td></tr><tr><td>TRC9.AA</td><td rowspan="2">AC/DC 24V (±10%)</td><td>BACnet MSTP</td><td rowspan="2">Temperature</td><td rowspan="2">-40...120°C</td><td rowspan="2">IP65 to IEC60529</td></tr><tr><td>TRC9.AG</td><td>Modbus RTU</td></tr></table>						Order Codes	Power Supply	Communication system	Measuring Variable	Measuring Units	Protection	TRC9.AA	AC/DC 24V (±10%)	BACnet MSTP	Temperature	-40...120°C	IP65 to IEC60529	TRC9.AG	Modbus RTU
Order Codes	Power Supply	Communication system	Measuring Variable	Measuring Units	Protection															
TRC9.AA	AC/DC 24V (±10%)	BACnet MSTP	Temperature	-40...120°C	IP65 to IEC60529															
TRC9.AG		Modbus RTU																		

Sensor Specification	Sensor Specification	Sensor Specification	Measured	Temperature
			Sensor Characteristics	Active
			Outputs	BACnet MSTP or Modbus RTU communication, RS485
			Temperature	see chart, page 4
			Measuring Range (T) (default)	-40°C...120°C
Technical Information	Electrical Information	Power Supply		AC/DC 24V (±10%)
		Frequency		50 / 60 Hz at AC 24V
		Terminal Clamp		Screw terminal, max. 1.5mm²
		Power Consumption		≤ 1W @ AC 24V / DC 24V
	Mechanical Information	Cable Length		1m
		Cable Lead Diameter		Ø0.25mm
		Cable Diameter		4.6mm
		Sensing Element Position		external, top of the sensor pocket
		Sensor Housing		Ø30mmx37mm
		Sensor / Housing connection		M12 screw-on connection
	Color and Materials	Housing Cover		White ABS, RAL9001 (Cream White)
		Housing Bottom		White ABS, RAL9001 (Cream White)
		Lock Screws		US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301
		Lock Nuts		Brass
		Sensor / Housing connection		Zink alloy - Nickel plated
		Cable Gland		Red ABS, RAL2002 (Vermilion)
		Gland Rubber Seal		White TBS, RAL9010 (Pure White)
	Environmental Conditions	Protection Caps		Red ABS, RAL2002 (Vermilion)
		Operation Temperature		-25°C...+70°C
		Operation Humidity		<85% r.h., no condensation
		Transport Temperature		-35°C...+70°C
		Transport Humidity		< 90% r.h.
		Storage Temperature		-10°C...+70°C
		Storage Humidity		< 85% r.h., no condensation
	Norms and Directives	IP- Rating		IP65 to IEC60529
		Safety Class		III to EN 60 730
		Product Standard 1		Automatic Electric. Controls for household and similar use
		Product Standard 2		2009/EN 60 730-1
		CE Conformities to		2004/108/EG Electromagnetic Compatibility EMV
		CE Electromagnetic Compatibility Emitted Interference		2000/EN60730-1 Emitted Interference
		CE Electromagnetic Compatibility Interference resistance		2000/EN60730-1 Interference Resistance
		RoHS Compatibility		RoHS 2011/65/EC
		Operation Climatic Condition		IEC 60 721-3-3
		Operation Mechanical Condition		IEC 60 721-3-2 to class2M2
		Transport to Climatic Condition		IEC 60 721-3-2
		Transport Mechanical Condition		IEC 60 721-3-2 to class2M2
		Storage Climatic Condition		IEC 60 721-3-1
		Storage Mechanical Condition		IEC 60 721-3-1 to class2M2
Miscellanies	Accessories	n/a		n/a
	Shipping & Handling	Minimum Order		1 box with 1 piece
		Rigid Cardboards Packaging		Rigid Cardboards
	Order Notes	Order Code		See Product Range, Page 1, e.g. TRC9.AA

Modbus Parameters	Address Number		Register Description	
	0...3	Serial Number	actual version	
	4	Software Version	actual version	
	6	Modbus Address	Default 254, selectable 1...254	
	8	Hardware Version	actual version	
	10	Protocol	0= MODBUS RTU ; 1= BACnet MSTP	
	11	Baud Rate autodetection	0= OFF ; 1= On	
	15	Baud Rate, (if autodetection is OFF)	0= 9600 ; 1= 19.200 ; 2= 38.400 ; 3= 57.600 ; 4= 115.200	
	34	Temperature, digital	actual value	
BACnet Parameters	Supported BACnet Objects Types			
	analog-value			
	device			
	Supported BACnet Services			
	who-is			
	i-am			
	object-identifier, object-name, object-type, present-value, units, object-list, vendor-id, vendor-name, system-status, confirmed-service, unconfirmed-services			
	MSTP Objects			
	analog-value			
		BACnet Address	Default 127, selectable 0...127	
	AV0	Baud rate autodetection	default 0, 0= OFF ; 1= ON	
	AV1	Baud Rate, (if autodetection is OFF)	0= 9600 ; 1= 19.200 ; 2= 38.400 ; 3= 57.600 ; 4= 115.200	
	AV2	Humidity Mode	0= Dew Point ; 1= Enthalpy ; 2= Absolute Humidity ; 3= relative humidity	
	AV3	Protocol	0= Modbus ; 1= BACnet	
	AV4	Temperature	actual value (-40...120°C)	
Device				
device-identifier				
device-name				
The function "Baud Rate autodetection" can only be used during the product is been setup. When the product is working with the BAS, the "Baud Rate autodetection" has to be set to 0= OFF and the actual Baud Rate has to be set.				
All Information and technical data are subject to alteration				
Thermokon Asia Pacific				
TRC9- Series (T) V20.2				
Page 3/4				

	<div> <div> <div>Installation Notes</div> <div> <div>  <div>Caution</div> </div> <div> <p>Observe the following general regulation for engineering and implementation:</p> <ul style="list-style-type: none"> All relevant national and heavy power regulation Other country specific regulations Country-specific regulations Local electrical supply authority regulation Schematics, cable listings, dispositions, specification and arrangements from the customer or engineering office in charge Third party specifications, e.g. general contractors or constructors </div> </div> </div> </div>												
<div>Advices</div>	<div> <div> <div>Mounting Advices</div> <div> <div>  <div>Caution</div> </div> <div>    </div> </div> </div> </div>												
	<div> <div> <div>Disposal Notes</div> <div> <div>  </div> <div> <p>The device is considered an electronic device for disposal in terms of the EUROPEAN DIRECTIVE 2012/19/EU.</p> <p>The device may not be disposed as domestic garbage.</p> <p>The device must be disposed through channels provided for this purpose.</p> <p>It is mandatory to comply with local currently applying laws and regulations.</p> </div> </div> </div> </div>												
<div>Accuracy Curve</div>	<div>  </div>												
<div>Dimensional Drawing</div>	<div>  </div>												
<div>Connections & Settings</div>	<div> <div> <div>Terminals Connection</div> <table> <tr> <th>T1</th><th>T2</th><th>T3</th><th>T4</th><th>T5</th><th>T6</th></tr> <tr> <td>UB+ 24V AC/DC</td><td>GND</td><td>RS485 - C-</td><td>RS485 - C+</td><td>n.a.</td><td>n.a.</td></tr> </table> </div> </div>	T1	T2	T3	T4	T5	T6	UB+ 24V AC/DC	GND	RS485 - C-	RS485 - C+	n.a.	n.a.
T1	T2	T3	T4	T5	T6								
UB+ 24V AC/DC	GND	RS485 - C-	RS485 - C+	n.a.	n.a.								

Thermokon Asia Pacific

All Information and technical data are subject to alteration

TRC9- Series (T) V20.2

Page 4/4